

MOZART S2

AC810B

CE UNI EN ISO 20345:2012 S2 SRC

Low shoe, water-resistant WRU leather thickness 1,8-2,0 mm.
Perspiring and abrasion resistant fabric lining.

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

SOLE ACTION bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

INSOLE 4000, removable, anatomic, absorbing, antistatic and perspiring.

Size 36-47 Shoe weight Sz 42 gr. 490




CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

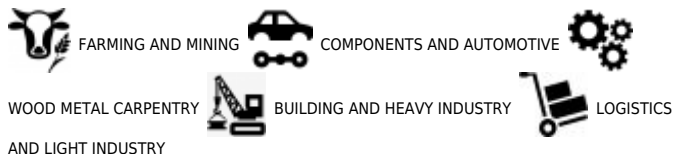

SOLE



Action is a shoe studied for external jobs, with soft lines making it very light and comfortable.

PLUS

ANTISLIPPING TEST RESULTS

SRC ANTI-SLIPPING SOLE		
SRA ceramic + NaLS	HEEL \geq	0,28
	FLAT \geq	0,32
SRB steel + glycerol	HEEL \geq	0,13
	FLAT \geq	0,18